

6

5

4


3

2

1

D

D




FABRICATION SPECIFICATIONS				
ITEM	TRICKY	DEPTH (mm)	DIAMETER (mm)	CLOCKFACE POSITION
Tank Depth	A	1500		
Tank Dia.	B		1000	
Inlet	C1		110	
Inlet	C2			
Inlet	C3			
Discharge	D		63	12
Cable Duct			110	
Vent			110	

PLEASE NOTE THAT THIS DOCUMENT MUST BE READ IN CONJUNCTION WITH THE INSTALLATION & OPERATING GUIDELINES

KIOSK (SINGLE DOOR)		
LENGTH (mm)	WIDTH (mm)	HEIGHT (mm)
750	400	1250

COMMENTS
PLEASE NOTE - INLET INVERT SHOULD BE BETWEEN 400 -515mm
INLET SEALS AND DUCTS CAN BE SUPPLIED LOOSE TO BE CRILLED AND FITTED ON SITE.

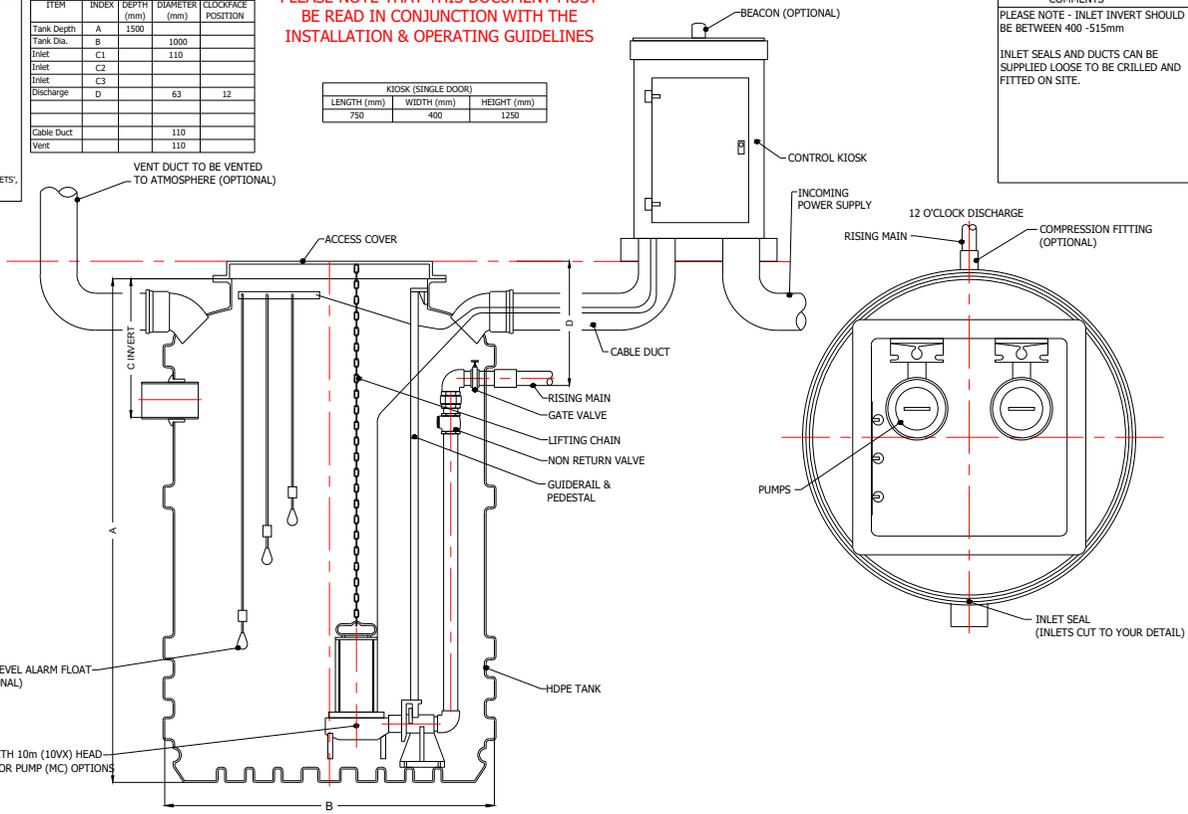

C

C

B

B

A

A

DRAWN BY Jc	DRAWING DATE (DD/MM/YY) 04/03/21	EFFECTIVE DATE: (DD/MM/YY) 04/03/21	PRODUCT NAME: Tricel Mini 1200L Twin	PRODUCT NUMBER: 104452	ACC NUMBER:	 TRICEL
TOLERANCE: +/- 5		MATERIAL: MDPE	SCALE: NOT TO SCALE	DRAWING TYPE: FG		
UNITS: mm		DRWG NO: N/A	TANK REVISION: 0	REV. NO. 0	PAGE SIZE: A4	
JOB NUMBER: N/A		WEIGHT (KG): 110	PROJECT NO:	ECO NO:	COUNTRY: UK	

6

5

4

3

2

1