

INDUSTRIAL ENCLOSURES

BY TRICEL

40+ YEARS
TECHNICAL
EXPERIENCE



IP66 ELECTRICAL ENCLOSURE

800 x 600 x 300MM SURFACE

FIRE RETARDANT TO BS 476, PART 7, 1997, CLASS 2

STOCK CODE: 105098



TRICEL

CONSTRUCTION

STOCK CODE:
105098

IP66 ELECTRICAL ENCLOSURE


800 x 600 x 300MM SURFACE

FIRE RETARDANT TO BS 476, PART 7, 1997, CLASS 2

**INDUSTRIAL
ENCLOSURES**
BY TRICEL

40+
YEARS
TECHNICAL
EXPERIENCE

Compliant with IEC 62208 (2011) - Empty enclosures for low-voltage switchgear and control gear assemblies.

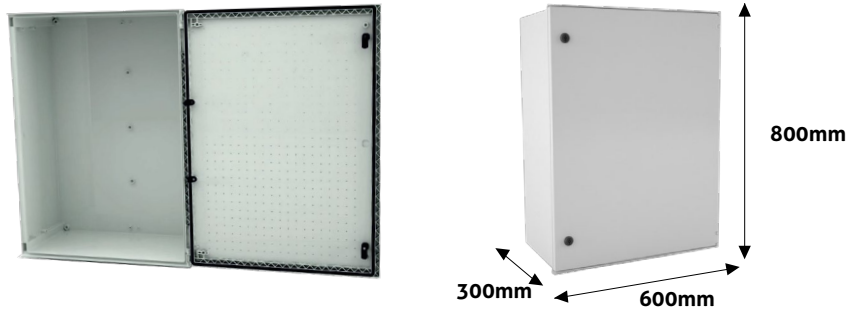

Example: IP66 Electrical Meter Box

DIMENSIONS

Internal dimensions: 773mm high x 557mm wide x 273mm deep

Outside dimensions: 800mm high x 600mm wide x 300mm deep

SPECIFICATION & KEY FEATURES

- IP66 rating suitable (EN 60529) suitable for electrical installations
- Certification of compliance with IEC 62208 (2011)
- Suitable for indoor or outdoor use
- Constructed from fire retardant GRP – Glass Reinforced Polymer.
- Fire retardant to BS 476, Part. 7, 1997, Class 2.
- Will not corrode, weather resistant.
- Complete with hinges, lock and key.
- Suitable for meters, electrical equipment, compressors, CCTV, industrial automation, marine etc.

Note: any electrical or gas equipment fitted to Tricel enclosures must be completed by an appropriately qualified person.

* Approximate dimensions.

In accordance with Tricel's normal policy of product development these specifications are subject to change without notice.

TRICEL UK

Tel: +44 (0)1453 791616

Registered number 02868648

TRICEL IRL

Tel: +353 (0)64 663 2421

Registered number IE 075014